

SFP-VDSL Modules

VDSL2 SFP Modules for Long Reach Ethernet



Features

- Supports plug-n-play operation
- Industrial standard small form-factor pluggable (SFP, MSA compliant) package
- Provides 100/100 Mbps up to 400m over CAT 5e
- Configurable SNR profile for noisy environment

Introduction

SFP-VDSL modules are integrated SFP bridge modem, a MSA compliant Small-Form Factor Pluggable module that enables traditional Ethernet switch, media converter and other network appliances to connect beyond typical Ethernet coverage (100 meters). Incorporated with the latest VDSL2 technology, this SFP modem can be easily adapted to existing applications with existing 2-wire cable, such as phone line, to avoid the cost of rewiring. It can drastically extend the Ethernet service on UTP wire with distance up to 3000 meters, and even with the rate of 100Mbps speed up to 400 meters on a standard Cat 5e 2 wire cable.


The SFP modules are also designed with flexible profiles settings for system integrator, or user, to select based on their unique applications and environment requirements. Symmetric profile can be applied as a standard Ethernet connection while Asymmetric profile can be used for other services like Video streaming or IP surveillance services which require high traffic flow in a uni-direction configuration. The SFP modem also supports Telco grade noise cancellation techniques like Interleave, high SNR profile, and retransmission that can effectively eliminate the noise impact to ensure your service/control messages can securely deliver in a harsh environment.

With long reach coverage, high noise immunity, and compact board size, the modules are an ideal upgrade for your Enterprise or Industry applications.

Specifications

| | | |
|--------------------------|---------------------------------------|---|
| Hardware | RJ-45 (LRE Port) | |
| | SERDES connect to host | |
| | LED 1 (CO/ CPE indicator) | |
| | LED 2 (PWR/ Link Status indicator) | |
| Software | Self Boot & Managed by Internal Flash | |
| | Linux driver for managed devices | |
| Power Requirement | 3.3v , 700mA | |
| Environment | Operating Temperature | -20 ~ +75°C (SFP cage itself, system operating temperature of the connected/linked main device depends respectively.) |
| | Storage Temperature | -40 ~ +85°C |
| | Operating Humidity | 5% to 90%(non-condensed) |
| | Storage Humidity | 5% to 95%(non-condensed) |
| | ESD Standards | Contact: +/-4KV Air: +/-8KV (EN 61000-4-2) |
| | Radiated RFI Standards | Strength:10V/m (EN 61000-4-3) |
| | EFT/BURST Standards | Power:2KV Signal:1KV (EN 61000-4-4) |
| Surge Immunity Standards | Power:2KV Signal:1KV (EN 61000-4-5) | |
| Certification | CE / FCC | |

Deployment Option

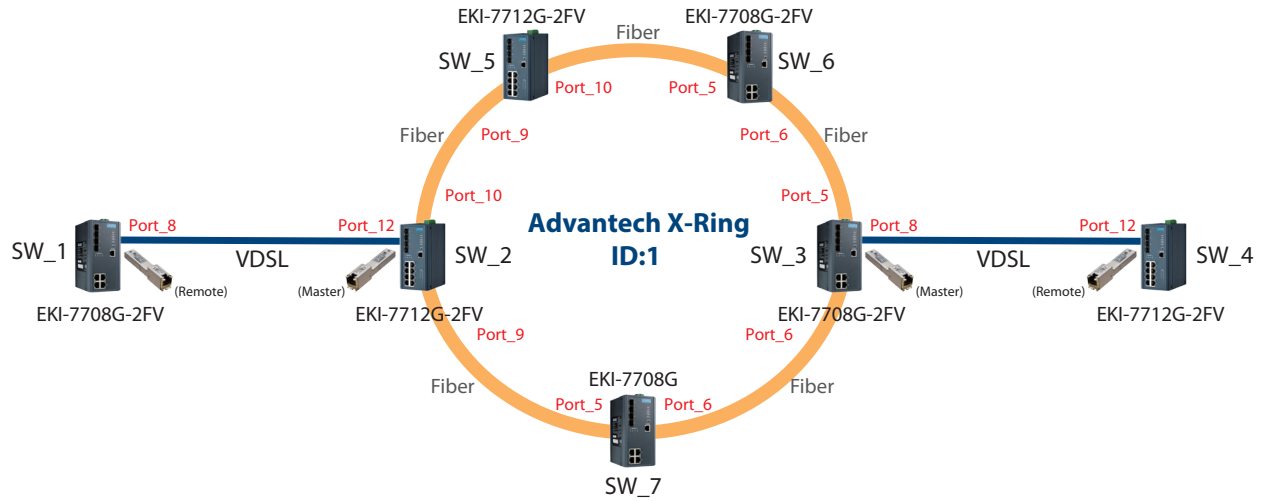

Ordering Information

- **SFP-VDSL** Master & Remote as a set
- **SFP-VDSL-M** Master, CO side (968AD00158)
- **SFP-VDSL-R** Remote, CPE side (96PD-00134)