



ON-FOT-FC30

High-Precision Fiber Cleaver

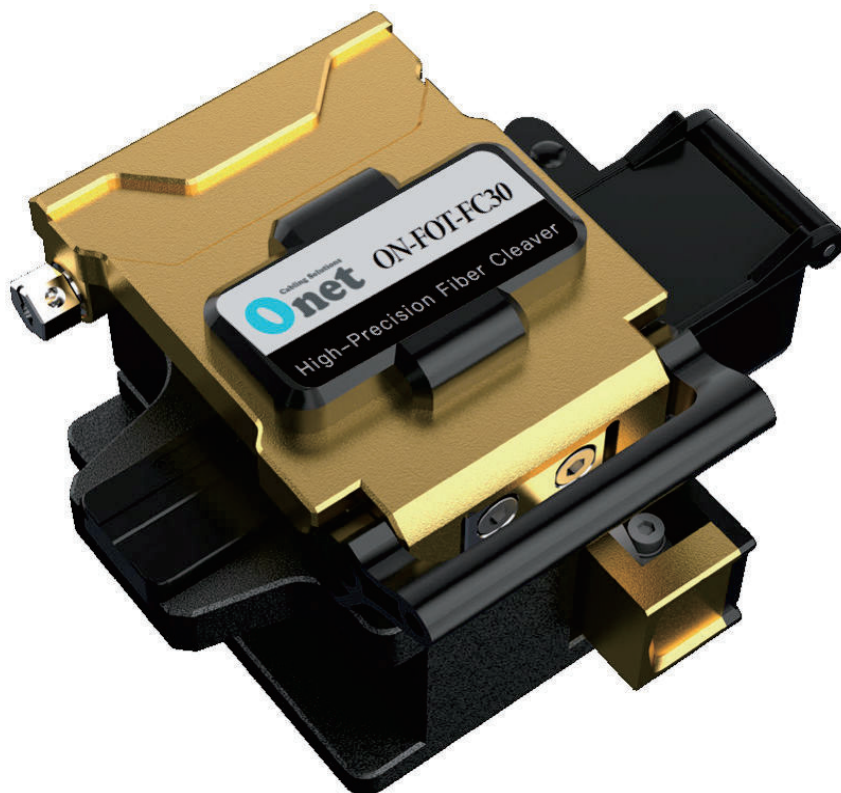


48000 times
blade life



3-in-1
universal holder



Double
fixture standard



≤ 0.5 degree
Cleaved angel



Product Features

- Blade life up to 48,000 times
- Double fixture design, suitable for various optical fibers of 250~3.0mm
- High-precision CNC machining and forming, excellent texture
- Typical cutting angle ≤ 0.5 degree
- Tungsten steel blade, wear resistance, high hardness, corrosion resistance
- Traditional bench top design, simple and easy to use



Product selling point



Pressure pad

Silicone pressure pad can effectively hold down the optical fiber




Holder

All-in-one fixture (dual fixture design)
Suitable for various optical fibers of 250~3.0mm




Blade

Real tungsten steel blade, wear resistance, high hardness, corrosion resistance




Slide

High-precision slide, open the cover will return automatically

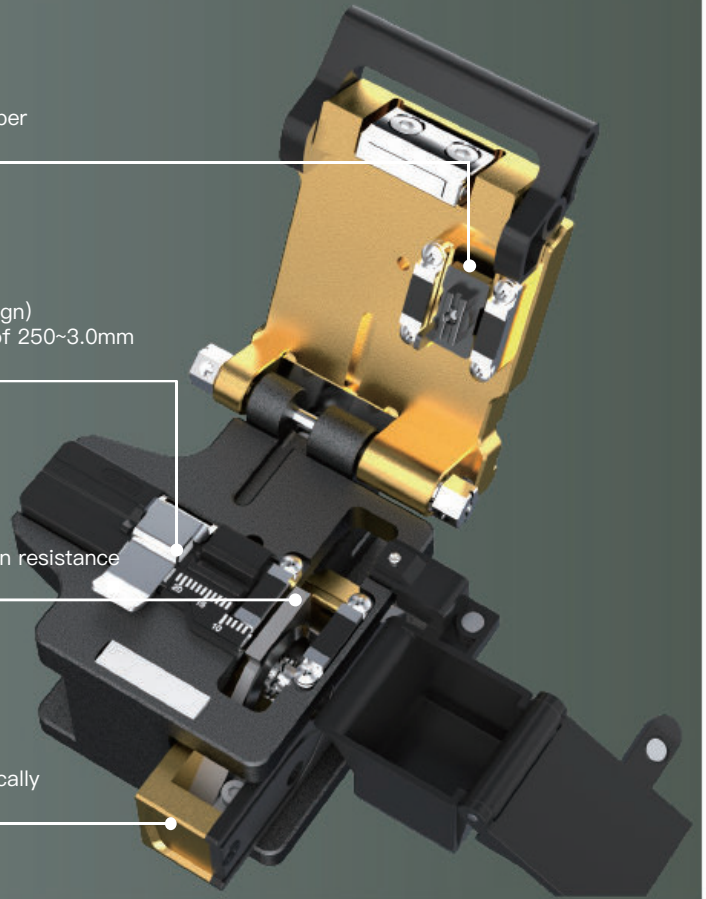

Double fixture standard

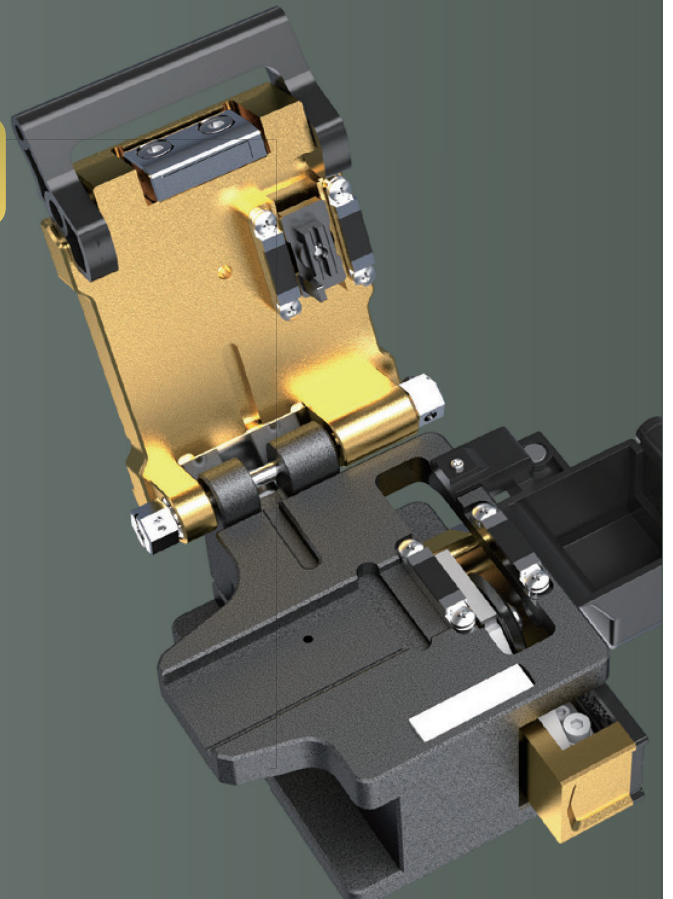

3-in-1 holder



Product parameter

Fiber Material	Single fiber
Cladding Diameter	125μm
Cleaved Length	Single fiber: 8~20mm / Ribbon fiber: 10mm
Applicable Fiber Cable	Single fiber: 250μm, 900μm, 3.0mm / flat cable / Ribbon fiber: 2 to 12 fiber cable
Typical Cleaved Angle	Less than 0.5 Degrees ★①
Typical Blade Life	Total 48,000 fiber cleaves (replaceable) ★②
Off-cut Collector	Pre-fitted
Type of Offcut Bin	Manual
Auto Return	Pre-fitted
Dimension / Weight	63W *77D*63H(mm) / 335g

★① The fiber cleave angle changes by operating environment



★② Blade life changes by operating environment

Product configuration

Fiber Cleaver	1
Carrying case	1
Fiber Clamp Type 2	1
Quick guide	1



Products Showing

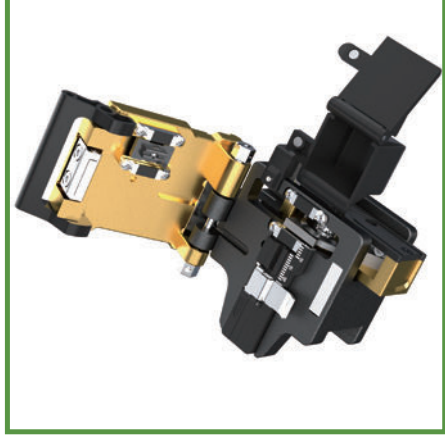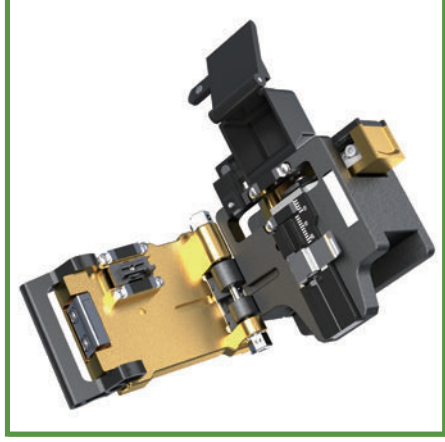

Onet Cabling
Solutions

CONTACT US:
www.onetoptical.com

