


The most robust cleaver



Single Fiber Cleaver
Fujikura CT08

- Dedicated for single fiber cleaving
- Fiber clamps and cleaving blade replaceable by user
- No tool necessary for blade rotation
- Wide lever opening allows easy fiber placement
- Simple and single-step operation

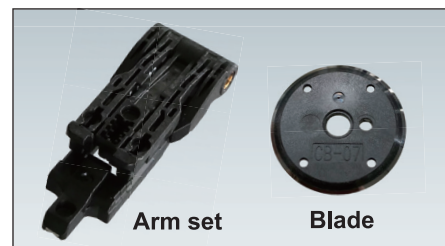

Fujikura CT08

SPECIFICATIONS

Description	CT08
Applicable optical fiber	Glass optical fibers
Number of fibers	Single
Cladding diameter	125 µm
Coating diameter	160µm to 900µm(2mm/3mm cord & drop cable)
Cleaving length	AD-50 5mm to 20mm (coating diameter = 250µm) 10mm to 20mm (coating diameter > 250µm)
	FH-xx- 10mm
Cleaving angle	Typical 0.5 degrees
Blade life	48,000 fibers (1,000 fibers x 3 heights x 16 positions)
Dimensions	110(W)×95(D)×45(H) mm
Weight	185g
Operation condition	Temperature: -10 to 50°C Humidity: 0 to 95% RH(Non-condensing)
Storage condition	Temperature:-40 to 80°C Humidity:0 to 95% RH(Non-condensing)
Resistance feature*	Shock : 76cm (30inch) all direction drop
	Dust resistance : Exposure to dust (0.1 to 500µm dia. Alumina Silicate)
	Rain resistance : H=10mm/hr for 10min

*Carried out in Fujikura labs in Japan. The shock resistance test do not guarantee the product will not be damaged under this conditions.

STANDARD ITEMS

Description	Model No.	Qty.
Main body	CT08	1pc
Fiber plate	AD-50	1pc
Spacer	SPA-CT08-10	1pc
Carrying case	CC-34	1pc
Hexagonal wrench	HEX-01	1pc
Instruction manual	M-CT08-EJ	1pc

OPTIONAL ITEMS

Description	Model No.
Blade	CB-07 (installed : 1pc)
Arm set	ARM-CT-08-01 (installed : 1pc)
Side cover	SC-CT08-01

Standard Package

CT08

Carrying case


CT08 Main body



Instruction manual
& Hexagonal wrench



AD-50



SPA-CT08-10

Optional Items



ARM-CT08-01



CB-07



SC-CT08-01

FIBER HOLDERS

Description	Model No.
Applicable fiber holder	FH-100-250 to 900
	FH-50-250 / FH-50-900
	FH-60-250 / FH-60-900
	FH-70-250 / FH-70-900

Cleaving procedure

1.Place fiber



2.Cleave



3.Finish



Please visit **NEW** web site!

<https://www.fusionsplicer.fujikura.com>



Facebook

<https://www.facebook.com/FujikuraFusionSplicers>



twitter

<https://twitter.com/fujikurasplicer>

Specifications and descriptions are subject to change without prior notice. ©2018 Fujikura Ltd.

Fujikura Ltd.

Fujikura Asia Ltd.

Fujikura Europe Ltd.

AFL

Fujikura (China) Co., Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan

Phone:+81-3-5606-1164 Fax:+81-3-5606-1534 <http://www.fujikura.com>

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967

Phone:+65-6-278-8955 Fax:+65-6-278-0965 <http://www.fujikura.com.sg>

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK

Phone:+44-20-8240-2000 Fax:+44-20-8240-2010 <http://www.fujikura.co.uk>

260, Parkway East, Duncan, SC29334, USA

Phone:+1-800-235-3423 Fax:+1-800-926-0007 <http://www.aflglobal.com>

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA

Phone:+86-21-6841-3636 FAX +86-21-6841-2070