

3M™ Fibrlok™ II Universal Optical Fiber Splice 2529

Applications

- Single mode and multimode fibers
- Both construction and maintenance
- Aerial, buried, underground, pedestal
- Inside or outside buildings
- FTTx, Metro and Enterprise networks
- Up to 10 Gigabit data rates
- High density substitute for connectors

Features	Benefits
< 0.1 dB typical insertion loss	High performance
30 second installation time	Increased productivity
Minimum tooling requirements	Low capital cost
No epoxy or electricity required	Easy on-site installation
Simple, easy to use	Minimal training, lower installed cost
Ability to reposition fibers	Improved splicing yield
Single splice for any combination 250 µm or 900 µm fibers	Reduced inventory


Specifications	
Fiber diameter	125 µm
Coating diameter	250 or 900 µm
Mean insertion loss	<0.1 dB
Reflectance	<-35 dB from -40° to 80° C (-40° to 176° F) <-60 dB typical at room temperature
Tensile strength	4.4N (1.0 lb.) minimum; 13.2N (>3.0 lbs.) typical
Material	Engineering thermoplastic with aluminum alloy element; UL 94, V-0 rating
Operating temperature	-40° to 80° C (-40° to 176° F)
Thermal cycling	Change in insertion loss <0.5 dB, -40° to 80° C (-40° to 176° F)
Fungus resistance	ASTM G-21-70; rating 0
Vibration	IEC 61300-2-1 (EIA standard FOTP-11; test condition 1)
Water immersion	Seven days @ 43° C; change in insertion loss ≤0.05 dB; 21,000 hours with <0.2 dB change
Extended high humidity	8,812 hours @ 85° C, 85% humidity with <0.2 dB change




3M™ Fibrlok™ II Universal Optical Fiber Splice 2529




3M™ Fibrik™ II Universal Optical Fiber Splice 2529

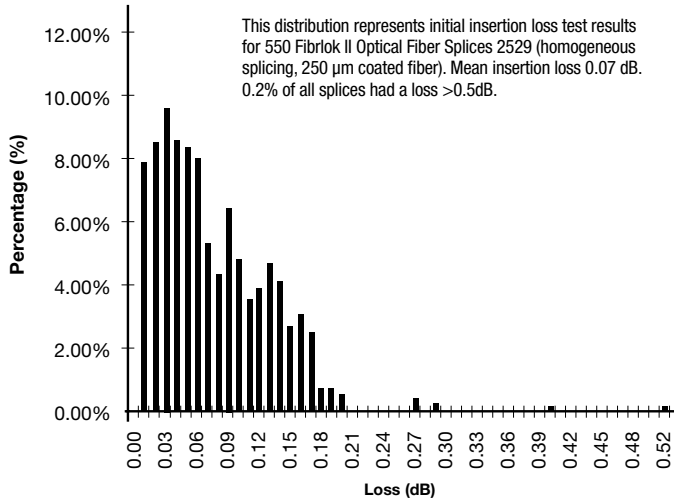

Cross-sectional view of open and actuated Fibrik II Splice 2529

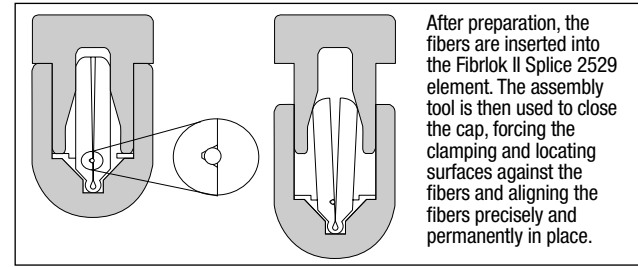

Dimensions (actual size)

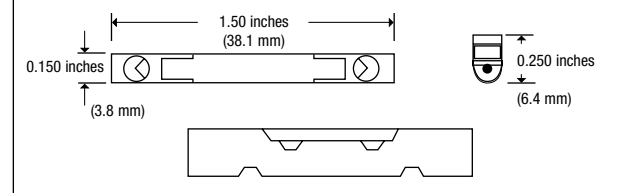

Ordering Information

To order, specify the correct product number from the chart below. For more information on the complete line of Fibrik™ Splicing products, contact your 3M sales representative.

Product Number	Product Description	3M ID	UPC	Packaging
2529	Fibrik™ II Universal Optical Fiber Splice (250 x 900)	80-6107-5589-6	0-00-54007-92202-5	6/pkg 10 pkg/case